

## SPECIFICATIONS

Satellite Signals Tracked Simultaneously	
Signal tracking	555 channels BDS B1,B2,B3 GPS L1C/A,L1C,L2C,L2E,L2P,L5 GLONASS L1C/A,L1P,L2C/A,L2P,L3 QZSS L1C/A,L1 SAIF, L1C,L2C,L5,LEX SBAS L1C/A,L5
GNSS features	Galileo Glove-A and Glove-B, E1, E5A, E5B, E5AtBOC, E6 Positioning output rate: 1Hz~50Hz Initialization time: <10s Initialization reliability: >99.99%
Positioning precision	
Code differential GNSS positioning	Horizontal: $\pm 0.25m+1ppm$ Vertical: $\pm 0.50m+1ppm$
SBAS positioning	Typically<5m 3DRMS
High-Precision Static	Horizontal: $\pm 3mm+0.1ppm$ Vertical: $\pm 3.5mm+0.4ppm$
Static and Fast Static	Horizontal: $\pm 2.5mm+0.5ppm$ Vertical: $\pm 5mm+0.5ppm$
UHF RTK	Horizontal: $\pm 8mm+1ppm$ Vertical: $\pm 15mm+1ppm$
Network RTK	Horizontal: $\pm 8mm+0.5ppm$ Vertical: $\pm 15mm+0.5ppm$
RTK initialization time	2~8s
User interaction	
Operating System	Linux
Buttons	Double Button Operation
Indicators	Four Indicator Lights
Web UI	Freely configure and monitor the receiver by accessing to the web server via Wi-Fi or USB
Voice guide	iVoice intelligent voice technology provides status and voice guide Supporting Chinese, English, Korean, Russian, Portuguese, Spanish, Turkish and user defined language
Secondary development	Providing secondary development kit
Hardware performance	
Dimension	130mm(Diameter)x85.3mm(Height)
Weight	820g
Material	Magnesium aluminum alloy shell
Operating	-45°C~+70°C
Storage	-55°C~+85°C
Humidity	100% Non-condensing
Waterproof	IP67 standard, protected from short time immersion to depth of 1m
Dustproof	IP67 standard, fully protected against blowing dust
Shock and vibration	Withstand 2 meters pole drop onto the cement ground naturally
Battery	6800mAh, Li-ion battery built in, 7.4V
Battery life	10-14hours (Supporting external battery)
Communications	
I/O port	5PIN LEMO external power port+RS232, 7PIN external USB(OTG)+Ethernet 1 radio antenna interface
Wireless modem	Built-in radio for receiving
Frequency Range	410-470MHz
Communication Protocol	TrimTalk450s, TrimMark3, SOUTH (KOLIDA)
Double Module Bluetooth	BLEBluetooth 4.0 standard, support for android, ios cellphone connection Bluetooth 2.1+EDR standard
NFC Communication	Realizing close range (shorter than 10cm) automatic pair between receiver and controller (controller equipped NFC wireless communication module needed)
External Devices	Optional external GPRS/EDGE dual-mode communication module, switchable; allow to connect external WLAN card
WIFI	
Standard	802.11 b/g standard
WIFI Hotspot	The WIFI hotspot allows smart mobile terminal to connect and access to the internal webserver to control and monitor receiver
WIFI data link	To work as the datalink that receiver is able to broadcast and receive differential data via WIFI
Data storage/ Transmission	
Data Storage	8GB SSD internal storage Support external USB storage (up to 32 GB) and automatical cycle storage Changeable record interval, up to 50Hz raw data collection
Data Transmission	USB data transmission, supporting FTP/HTTP data download
Data Format	Differential data format: CMR+, CMRx, RTCM 2.1, RTCM 2.3, RTCM 3.0, RTCM 3.1, RTCM 3.2 GPS output data format: NMEA 0183, PJK plane coordinates, Binary code, Trimble GSOFF Network model support: VRS, FKP, MAC, fully support NTRIP protocol
Inertial sensing system	
Electronic bubble	Controller software displays electronic bubble, user can check leveling status of the centering rod real time
Thermometer	Built-in thermomter sensors, features intelligent temperature control technology which can monitor and adjust the temperature of receiver in real time

**KOLIDA**  
Professional's Choice

## SuperRTK K3K

555 Channels, Smallest Full Function RTK Ever  
Enhanced BEIDOU Signal Processing Ability  
14 Hours Continuous Working  
Web UI, Wifi, E-Bubble



**KOLIDA**  
Professional's Choice

**GUANGDONG KOLIDA INSTRUMENT CO., LTD.**

Add: 7/F, South Geo-information Industrial Park, No.39 Si Cheng Road, Tian He IBD, Guangzhou 510663, China

Tel: +86-20-22139033 Fax: +86-20-22139032

Email: export@kolidainstrument.com market@kolidainstrument.com http://www.kolidainstrument.com

## 555 Channels Full constellations

K3K is equipped with a high performance 555 channels GNSS board and capable of supporting multiple satellite constellations: GPS, GLONASS, BEIDOU and GALILEO, including the latest Beidou-3 system.




## Small As an Apple


The diameter of the K3K is only 13cm, height only 8.53cm, and the weight is only 820g. It is as small as an apple that you can even put it into your pocket.

## New Integration Technology New Level of Stability

GNSS antenna, Bluetooth, wifi module are integrated into one board, which helps to save the internal space of K3K, making the signal better and performance more stable.



## The Smallest UHF Radio in the History

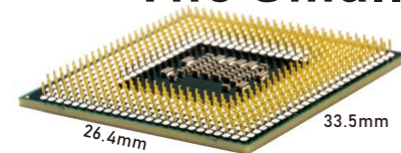

The latest micro UHF receiving module has high sensitivity and low power consumption.

## Magnesium Aluminum Alloy Shell Is Shatter Resistant

K3K is able to withstand 2 meters pole drop onto the cement ground naturally and fully protected against blowing dust.



## Energized Battery Increased Working Time

4 hours quick charge is enough to enable K3K a 14 hours of using time.



## Other Features

Linux OS	Web UI	WIFI	Electronic Bubble
410-470MHZ Radio	8G SSD Storage	OTG FIELD DATA DOWNLOAD	NFC
Bluetooth 4.0+2.1	Mobile Reference Station (WIFI)		

## New Case, More Portable



The light weighted case for K3K is stable and wear resistant.

## Data Collector. Simply Trustable



### T17N

- Windows Mobile 6.5
- 1Ghz CPU, RAM 512MB
- 1GB ROM, Extendable to 32GB
- 3.7V, 6500mAh removable Li-ion
- 3.7 Inch, 480X640VGA
- WCDMA
- Include EGSTAR3.0



### H3PLUS

- Android 6.0
- Quad-core 1.3GHz CPU, 2GB RAM
- 4.3 Inches, WVGA 800X480dpi
- 8 megapixel camera with auto focus
- 6500mAh, up to 10Hours
- Dual SIM Card
- 4G FDD TDD network, 3G WCDMA
- GPS\GLONASS\SBAS\A-GPS
- Include EGSTAR

## New app. New Productivity

### SurvX Android

Windows CE data controller is too old technology? No problem. Simply download SurvX App on your smart phone or tablet. Enjoy the smooth operation of Android platform !



### Seamless Connection

- NFC
- Saving-Time Bluetooth Search
- Auto Connection

### Intuitive interactive design

- Reducing mistakenly touching
- User define program menu
- Signal strength graphic display

### Rich & Practical Programs

- CAD function & Line work
- 3D display mode
- Road & Power line program


### Creativity

- Saving & Sharing coordinate system by QR code
- Data recovery & Encryption function
- Support Google map and other base map

## Post-processing SW. Free of Charge

### KOLIDA GEO Office

Integrates static data processing and kinematic data adjustment

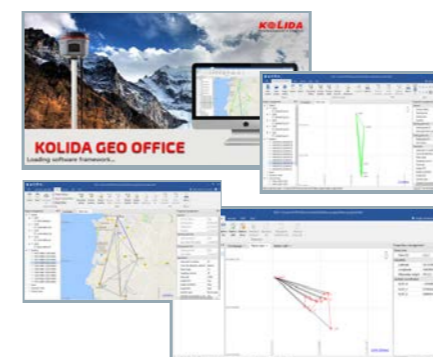

### Intelligent

- Antenna manager with popular receiver types.
- Fast processing and clear display
- Manually edit and filter satellite data for best result
- Update online.

### Versatile

- Compatible with numerous data format.
- Export abundant types of report.
- Transformable to RINEX format